


DFB Quantum Cascade Lasers in the 9.5 μm region

datasheet

description

nanoplus 9.5 μm DFB quantum cascade lasers show unique device performance to meet the requirements of our customers. Their high side mode suppression ratio (SMSR) and high spectral purity make them perfectly suited for applications like e.g. CO₂ sensing. The devices work in pulsed mode at operation temperatures up to 260 K.

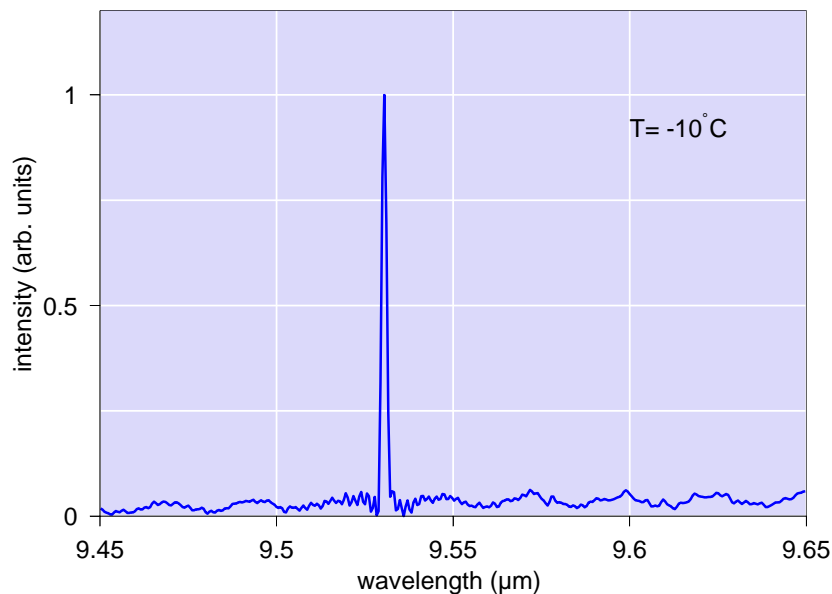

specifications *

Parameter	Symbol	Unit	min	typical	max
Wavelength		μm		9.55	
Optical output power	P _{opt}	mW	05	1	2
Forward current	I _f	A	5.6	6.2	7
Threshold current	I _{th}	A	5.5	6	6.5
Beam divergence parallel		deg.	35	40	45
Beam divergence perpendicular		deg.	55	60	65
Emitting area	WxH	μm		8x20	
Slope efficiency	e	mW/A	0.04	0.06	0.08
Temperature tuning rate	C _T	nm/K	0.4	0.5	0.6
Pulswidth	Dt	ns		100	150
Rep. Rate	f	kHz		3	10

*) preliminary data

nanoplus GmbH
 Nanosystems and Technologies
 Oberer Kirschberg 4
 D-97218 Gerbrunn
 Germany
 phone: +49 931 90827-0
 fax: +49 931 90827-19
 www.nanoplus.com
 sales@nanoplus.com

■ absolute maximum ratings

Parameter	Symbol	Unit	Rating
LD forward current	I_f	A	7
Operating temperature	T_{op}	K	<260
Storage temperature	T_{store}	K	0 to 370

■ applications

- trace gas sensing of CO₂

■ packaging

nanoplus offers a wide variety of different packaging options for their FP and DFB laser diodes in the entire wavelength range, including C-mount or TO 8 header with or without Peltier cooler. Please refer to our *packaging datasheet* for more information.

Other customized packages (e.g. mounting on customer specific submounts) are available upon request. Please do not hesitate to contact us for further details.

