



LD-1320-1500-M



Features:

- Output Power 1.5W、High Stability
- Efficient Quantum Well Structure
- Standard C-Mount Package

Applications:

- Solid-state Laser Pumping
- Medicine/Life and Health Sciences
- Illumination
- Material Processing

Absolute Maximum Ratings

T_{case}=25 °C

Parameter	Symbol	Value	Unit
Output Power	P _o	1.5	W
LD Reverse Voltage	V _R	2.5	V
Operating Temperature	T _{op}	15~30	°C
Operating Humidity	H _{op}	Non-condensing	RH
Storage Temperature	T _{stg}	-20~+80	°C
Lead Soldering Temperature (<5 sec.)	T _{is}	260	°C


Initial Electrical/Optical Characteristics

T_{case}=25 °C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold Current	I _{th}	CW	-	0.3	0.4	A
Operating Current	I _{op}	P _o =1.5W	-	3.1	3.5	A
Operating Voltage	V _{op}	P _o =1.5W	-	1.30	1.50	V
Wavelength	λ _{peak}	P _o =1.5W	1300	1320	1340	nm
Spectral Width	FWHM	P _o =1.5W	-	6	10	nm
Wavelength Temperature Coeff.	Δλ/ΔT	-	-	0.7	-	nm/°C
Slope Efficiency	η	-	-	0.50	-	W/A
Power Conversion Efficiency	η _{TOT}	-	-	≥35	-	%
Beam Divergence (FWHM)	Parallel	Q	P _o =1.5W	-	8	°
	Perpendicular	Q _⊥	P _o =1.5W	-	8	°
Polarization	TE					

*The production test specifications are tested by CW driver mode at 25°C.

Outline Dimension

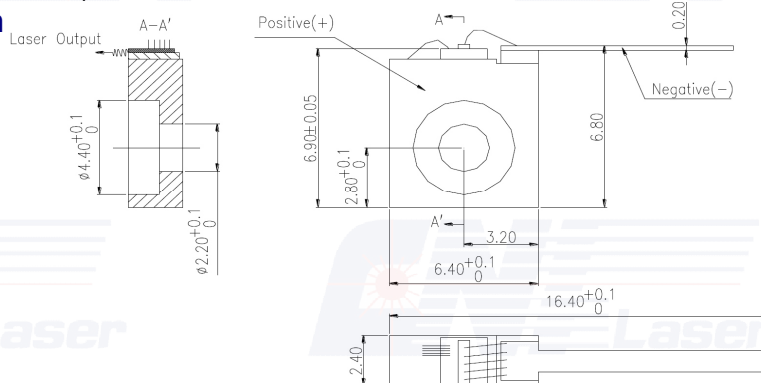

LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO
DIRECT OR SCATTERED RADIATION
CLASS 4 LASER PRODUCT

CAUTION
STATIC SENSITIVE DEVICE
OBSERVE PRECAUTIONS



* Measuring specifications.

All figures in this specification are measured by CNI's method and may contain measurement deviations.

The above specifications are for reference purpose only and subjected to change without prior notice.

Changchun New Industries Optoelectronics Tech. Co., Ltd

<http://www.cnilaser.com>

No.888, Jinhu Road, High-tech Zone, Changchun 130103, China

Phone: +86-431-85603799

Fax: +86-431-87020258