




MDL-III-810

SPECIFICATIONS




Wavelength (nm)	810±3
Operating mode	CW
Output power after fiber (mW)	>100
Fiber	400um, 0.22NA, MM, 1m, PVC / Metal optional
Connector type	FC, fiber fixed on the laser head
Power stability (rms, over 4 hours)	<3%
Warm-up time (minutes)	<10
Operating temperature (°C)	10~35
Power supply (220VAC)	PSU-III-LED
Modulation option	Analog modulation optional
Expected lifetime (hours)	10000
Warranty	1 year

MDL-III-810-MM

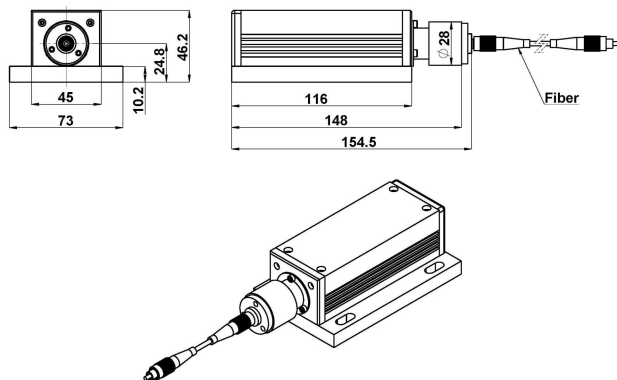

154.5x73x46.2mm , 0.85kg

PSU-III-LED

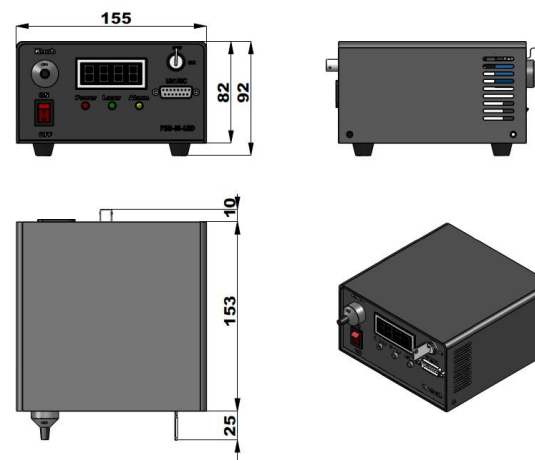

153 (L) ×155(W) ×92 (H) mm³, 1.5kg