



MGL-U series



DPSS LASER

All solid state laser is made features of ultra compact, long lifetime, high stability and reliability, which is used in scientific experiment, medical measurement, instrument, spectrum analysis, etc.



SPECIFICATIONS

Part number	MGL-U-532		MGL-U-543	MGL-U-556	MGL-U-561		MGL-U-577		MGL-U-585	
Wavelength (nm)	532±1		543±1	556±1	561±1		577±2		585±1	
Operating mode	CW									
Output power (mW)	1- 1000	1000-1500	1-200	1-200	50-100	100-300	1-100	100-500	1-50	
Power stability (rms, over 4 hours)	<3%,<2%,<1%	<3%,<2%	<3%,<2%,<1%	<3%,<2%,<1%	<3%,<2%,<1%	<3%,<2%	<3%,<2%,<1%	<5%,<3%,<2%	<5%,<3%,<2%	
Transverse mode	TEM ₀₀								Near TEM ₀₀	
M ² factor	<1.2						<1.5		<2.0	
Beam diameter at the aperture (1/e ² , mm)	<1.0									
Beam divergence (mrad)	<1.5									
Polarization Ratio	>100:1, Horizontal (Vertical Optional)		>100:1, Vertical (Horizontal Optional)				>100:1, Horizontal (Vertical Optional)			
Warm-up time (minutes)	<5									
Pointing stability after warm-up (mrad)	<0.05									
Beam height from base plate (mm)	27.4									
Laser head consumption(W)	15 (typical) , <25 (40°C)									
Max. Laser Head Base plate Temp (°C)	50									
Operating Temperature (°C)	10-35									
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional									
Power supply (90-264VAC)	PSU-H-LED/PSU-H-FDA/PSU-SR									
Expected lifetime (hours)	10000									
Warranty	1 year									

Note: The laser head needs to be used on a heat sink with good heat dissipation.








SPECIFICATIONS

Part number	MGL-U-588	MGL-U-589
Wavelength (nm)	588±1	589±1
Operating mode	CW	
Output power (mW)	1-200	1-200
Power stability (rms, over 4 hours)	<3%, <2%, <1%	<3%, <2%, <1%
Transverse mode	TEM ₀₀	
M ² factor	<1.2	
Beam diameter at the aperture (1/e ² , mm)	<1.0	
Beam divergence (mrad)	<1.5	
Polarization Ratio	>100:1, Horizontal (Vertical Optional)	
Warm-up time (minutes)	<5	
Pointing stability after warm-up (mrad)	<0.05	
Beam height from base plate (mm)	27.4	
Laser head consumption(W)	15 (typical) , <25 (40℃)	
Max. Laser Head Base plate Temp (°C)	50	
Operating Temperature (°C)	10-35	
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional	
Power supply (90-264VAC)	PSU-H-LED/PSU-H-FDA/PSU-SR	
Expected lifetime (hours)	10000	
Warranty	1 year	

Note: The laser head needs to be used on a heat sink with good heat dissipation.

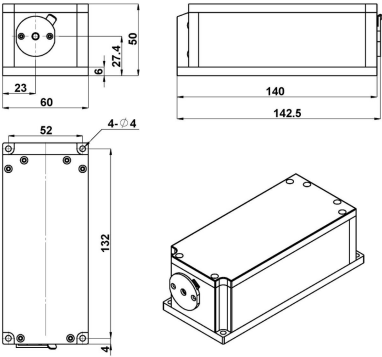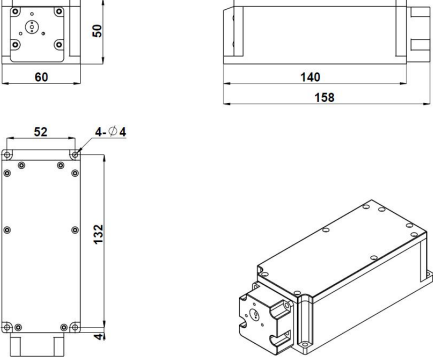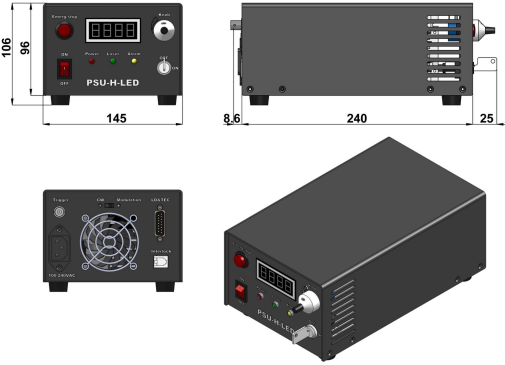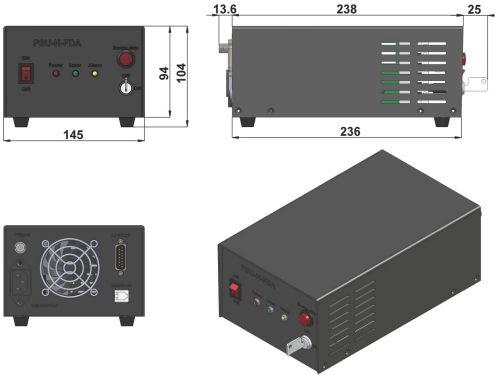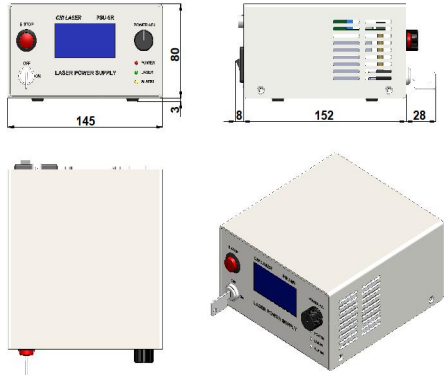

LASER HEAD	LASER HEAD (MGL-U-594)	POWER SUPPLY (PSU-H-LED)
 <p>142.5 (L)×60(W)×50(H) mm³, 1.0 kg</p>	 <p>158 (L)×60(W)×50(H) mm³, 1.0 kg</p>	 <p>273.6 (L)×145(W)×106 (H) mm³, 2.3 kg</p>
POWER SUPPLY (PSU-H-FDA)	POWER SUPPLY (PSU-SR)	
 <p>276.6(L)×145(W)×103.6(H) mm³, 2.3 kg</p>	 <p>188(L)×145(W)×83(H) mm³, 1.2kg</p>	