


## HL40053MG

404nm / 500mW    Violet Laser Diode


### Outline

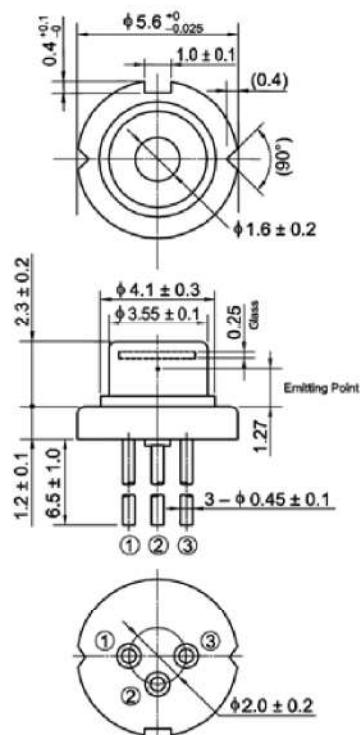

(Unit: mm)

### Internal Circuit

#### • HL40053MG



### Features

- Optical output power: 400mW (CW)
- Violet Lasing: 398~410nm
- Low operating current: 370mA Typ.
- Low operating voltage: 4.9V Max.
- Package: Ø5.6mm
- Multiple transverse mode
- TE mode oscillation

### Application

- Bio & Medical
- Measurement

**Absolute Maximum Ratings (Tc=25°C)**

Item	Symbol	Ratings	Unit
Optical output power	Po	500	mW
LD Reverse Voltage	V <sub>R(LD)</sub>	5	V
Operating Temperature	T <sub>opr</sub>	0 ~ +30	°C
Storage Temperature	T <sub>stg</sub>	-35 ~ +85	°C

**Optical and Electrical Characteristics (Tc=25°C)**

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Threshold current	I <sub>th</sub>	-	110	130	mA	-
Operating current	I <sub>op</sub>	-	370	410	mA	Po=400mW
Operating voltage	V <sub>op</sub>	-	-	4.9	V	Po=400mW
Beam divergence Parallel to the junction	θ//	5	13	25	°	Po=400mW, Full angle 1/e <sup>2</sup>
Beam divergence Perpendicular to the junction	θ⊥	30	42	50	°	Po=400mW, Full angle 1/e <sup>2</sup>
Lasing Wavelength	λ <sub>p</sub>	398	404	410	nm	Po=400mW

## Typical Characteristic Curves

